
		8	7	I
	ITEM	DESCRIPTION	MATERIAL	FINISH
	Α	U.FL PLUG	BRASS	GOLD
	В	SMA FEM. BULKHEAD MOUNT CONNECTOR	BRASS	NICKEL
D	С	CABLE	1.13mm COAXIAL	GRAY
	D	NUT	BRASS	NICKEL
	E	WASHER	BRASS	NICKEL
	F	HEAT SHRINK TUBING	POLYOLEFIN	BLACK
				-

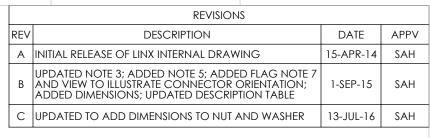

MERLIN, OR 97532

REV

C

SHEET 1 OF 1 LDCFDFB_C


CABLE ASSEMBLY, U.FL TO FEM.

BLKHD SMA, 1.13mm CBL

B CSI-SAFB-ccc-UFFR

SIZE DWG. NO.

DT: 15-APR-14 SCALE: 2.5:1. DO NOT SCALE DRAWING

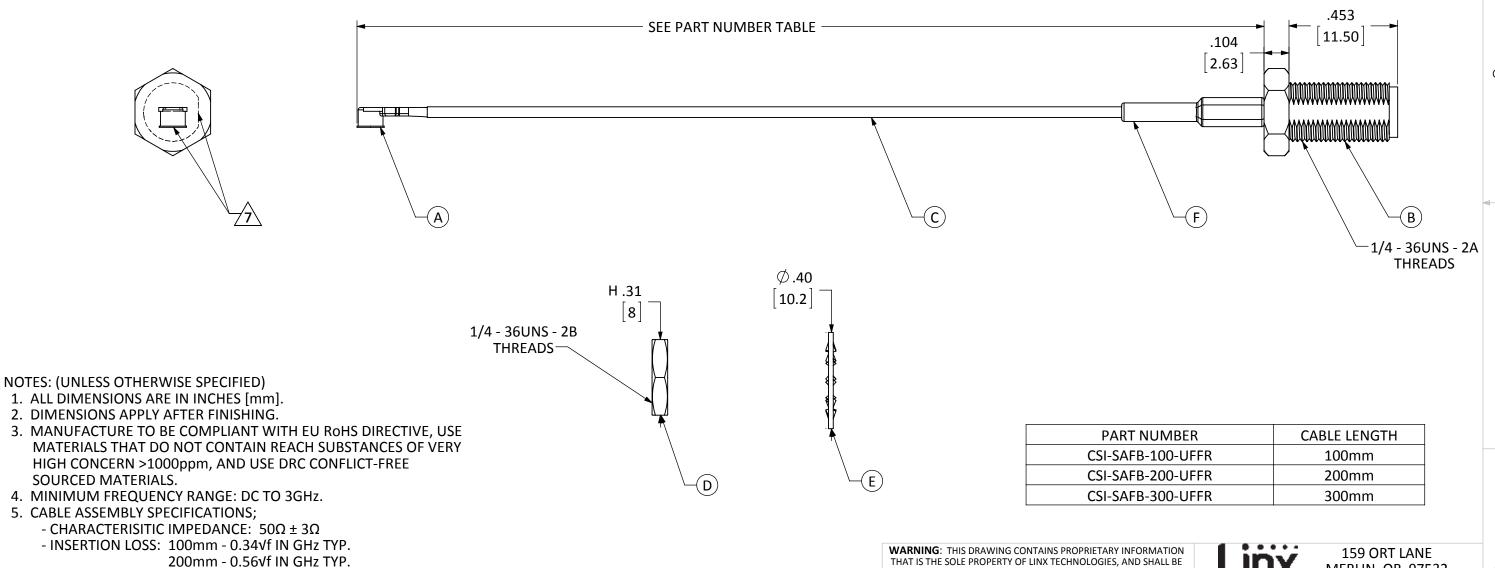

TREATED AS SUCH. NO DISCLOSURE OR REPRODUCTION OF THIS

DOCUMENT IS PERMITTED, IN WHOLE OR IN PART, WITHOUT THE

EXPRESS WRITTEN PERMISSION OF LINX TECHNOLOGIES OR ITS

DESIGNATED AGENTS.

INTERPRET DIMENSIONS AND

TOLERANCES PER ASME Y14.5.

ENGR: S.HOGAN

3

SURFACE FINISH: ³² ANGLES: ±1°

TOLERANCES: .X ±.1 .XX ±.01 .XXX ±.005

DRAWN: B.MURPHY DT: 26-MAR-14

MATERIAL:

FINISH:

FLAT FACE, AS SHOWN.

200mm - 0.56√f IN GHz TYP.

300mm - 0.73√f IN GHz TYP.

6. CONNECTOR TO BE APPLIED IN ACCORDANCE WITH CONNECTOR

7\CONNECTORS TO BE ORIENTED WITH U.FL CONNECTOR MATING

FACE 90° CLOCKWISE FROM BULKHEAD CONNECTOR THREAD

SUPPLIER RECOMMENDED PROCEDURE.